

Dometic Dependability with

Travel Power TM *Generators*



Travel Power... from 500 to 10,000 watts power plant

BUILT-INS


The TRAVEL POWER series of Dometic generators offers many exclusive features.

Surge capacities are the highest of any other brand.* This means that when you want to start your RV air conditioner, ample wattage will be there...instantly! Yet, the energy consumption and cost of operation are remarkably low.

Dometic's exclusive solid-state ignition systems maintain a constant high-voltage reliable spark for more complete combustion and ease of starting at all temperatures.


Anywhere, anytime... a Dometic TRAVEL POWER generator will deliver the power you need to operate your RV's comfort and convenience accessories. Run an air conditioner, keep food refrigerated, do the cooking, heat the water, and turn on the lights. TRAVEL POWER by Dometic gives the freedom you need to enjoy the great outdoors. All Dometic products are supported by a nationwide network of sales and service centers.

*In critical lab tests, one of Dometic's generators withstood a surge of 9000 watts for short periods of time.

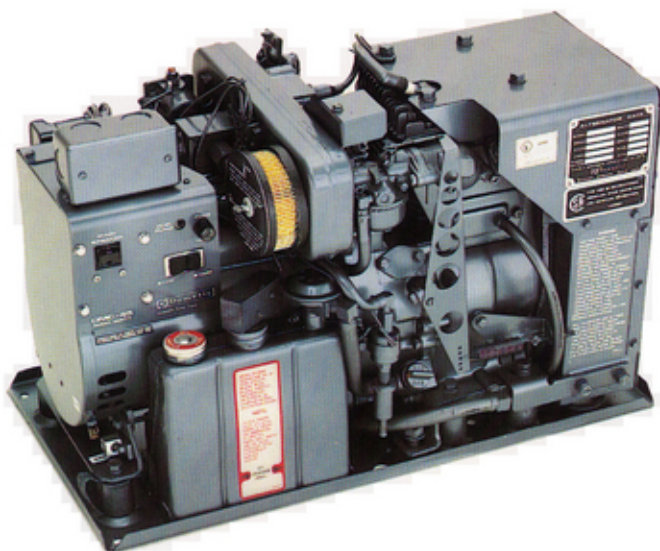


DMC-45

Leading the industry with its unique combination of compact size, light weight, power output, and noise reduction. Special features include simplified maintenance and unexcelled fuel savings. Its continuous duty load is rated at 4000 watts, with a surge capacity to 5000 watts. The DMC-45 has an internal ANTI-VIB mechanism to greatly reduce the vibration normally transmitted through the coach. A low-oil shut-down switch prevents costly engine damage.

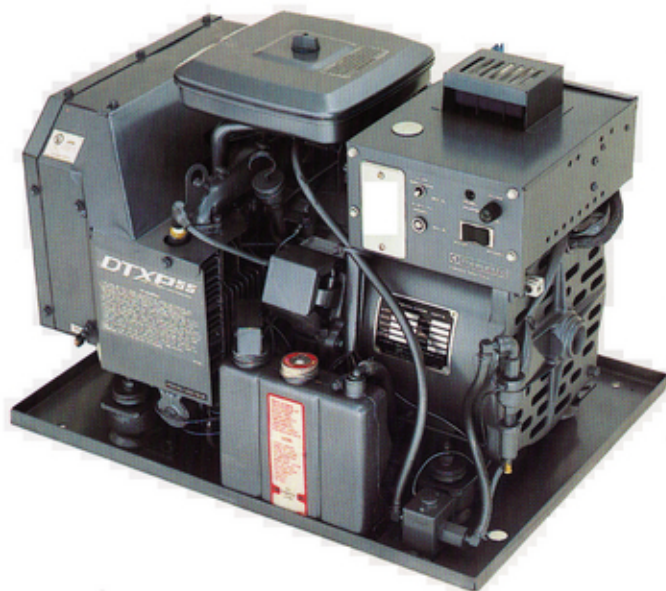

DTXP-55

A twin-cylinder, 1800 RPM generator that out-performs others in its class. Its continuous duty load is rated at 4500 watts, with a surge capacity to 5500 watts. It's ideal for Class A motorhomes, and similarly-sized units, where extreme power requirements may be in demand.

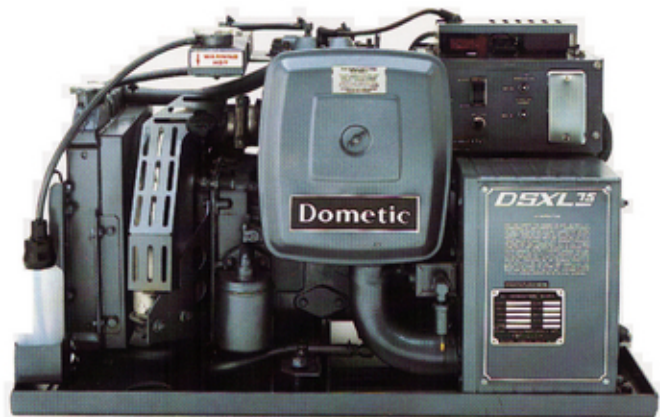

DSXL-75 LIQUID COOLED

Longer engine life (ten times greater than standard air-cooled models) means less maintenance and increased dependability over years of service. The DSXL-75 also has the special ANTI-VIB feature that reduces vibration normally transmitted through your RV. The proven dependability of a liquid-cooled generator makes it the top choice, not only for custom built coaches, but also for luxury yachts where standards were originally established for superior, dependable performance.

8,000 watts, the most technically advanced
is available today.

PORTABLES



DPG 600



DPG 1350

DOMETIC DEPENDABILITY IS THERE!

- During blackouts, a Travel Power portable acts as a standby unit when the lights go out.
- Few people really want to "rough it" when camping. Why should you when you can take along a compact power supply to enjoy the electrical comforts of home.
- With electrical lawn and garden equipment, your Travel Power portable is the perfect source you need to operate electric power tools.
- An all-around work mate to the handyman or farmer, a Travel Power portable aids in making home repairs, doing chores, and construction jobs.



DPG 2250



DPG 3750



Dometic

quality leisure line products

	DMC-45	DTXP-55	DSXL-75
Power (Continuous)	4000 Watts	4500 Watts	6500 Watts
Surge Capacity (Up to)	5000 Watts	5500 Watts	8000 Watts
Voltage	120/240 Volts (factory wired for 120 Volts)	120/240 Volts (factory wired for 120 Volts)	120/240 Volts (factory wired for 120 Volts)
Voltage Control	solid state regulation $\pm 2\%$ proportionate to frequency	solid state regulation $\pm 2\%$ proportionate to frequency	solid state regulation $\pm 2\%$ proportionate to frequency
Current	33.3/16.7 Amps	37.5/18.7 Amps	54.2/27.1 Amps
Battery Charge	12 Volts DC at 3 Amps (trickle charge will not boil battery)	12 Volts DC at 3 Amps (trickle charge will not boil battery)	12 Volts DC at 3 Amps (trickle charge will not boil battery)
Frequency	60 Hz.	60 Hz.	60 Hz.
Size	300 CC with "Anti-Vib"	656 CC	562 C.C.
Features	stellite valves, hardened valve seats, forged steel crankshaft & ball bearings, cast iron cylinder sleeve, chrome-plated piston and piston rings	stellite valves, hardened valve seats, forged steel crankshaft & ball bearings, cast iron cylinder sleeve, chrome-plated piston and piston rings	cast iron "L" head and aluminum crankcase, aluminum cylinder housing with chrome-plated steel cylinder sleeve, forged steel crankshaft, hydraulic valve lifters, low noise gear train
Engine Speed	3600 RPM	1800 RPM	3600 RPM
Oil	2 pint engine capacity - 6 pint reserve tank, automatic low oil shutdown	3 pint engine capacity - 6 pint reserve tank, automatic low oil shutdown	3 qts. capacity
Starting	electric (automotive type ring gear)	electric (automotive type ring gear)	electric (automotive type ring gear)
Fuel Pump	electric solid state	electric solid state	electric solid state
Ignition	high-energy solid state	high-energy solid state	high-energy solid state
Choke	automatic electric, time sequencing	automatic electric, time sequencing	automatic electric, time sequencing
Air Intake	silencing expansion chamber	silencing expansion chamber	silencing expansion chamber
Fuel Consumption	.67 gal./hour @ full load intermittent	.75 gal./hour @ full load intermittent	.91 gal./hour @ full load intermittent
Fuel Type	unleaded recommended	unleaded recommended	unleaded recommended
Coolant	N/Z	N/A	2.5 Qts.
Coolant Air	750 CFM	620 CFM	1000 CFM
Weight	135 lbs.	212 lbs.	266 lbs.
Height	15-5/8"	18-3/4"	19-1/2"
Width	14-1/8"	25-1/2"	32-3/4"
Depth	13-1/8"	19"	19-3/4"

PORTABLES

	DPG 600	DPG 1350	DPG 2250	DPG 3750
Power (continuous)	500 Watts	1350 Watts	2250 Watts	3750 Watts
Surge Capacity (up to)	600 Watts	1700 Watts	2800 Watts	4600 Watts
Dimensions	Length - 17.6" Width - 7.9" Height - 12.4"	Length - 18.1" Width - 15" Height - 14"	Length - 20" Width - 15" Height - 15.5"	Length - 25" Width - 18" Height - 16.5"
Weight	45.9 Lbs.	66 Lbs.	74 Lbs.	112 Lbs.
Volts	120	120	120	120/240
Amps	4.2	11.25	18.75	31.25/15.6
Hz.	60	60	60	60
Battery Charging	10 Amps	3 Amps	3 Amps	3 Amps
Outlets	1-120V-15 Amp	2-120V-15 Amp	2-120V-15 Amps	2-120V-15 Amps 1-120V-30 Amp 1-240V-20 Amp
Horse Power Ignition	1 Hp.	3 Hp.	5 Hp.	8 Hp.
Ignition	CDI	CDI	CDI	CDI

Specifications Subject To Change Without Notice.



Dometic

quality leisure line products

Elkhart, IN 46515
2320 Industrial Parkway
P.O. Box 490
(219) 295-5228

City of Industry, CA 91746
14441 Bonelli St.
(213) 968-9431

Stone Mountain, GA 30083
1625-A Rock Mountain Blvd.

Portland, OR 97223
7895 S.W. Hunziker Rd.
(503) 620-9510

Arlington, TX 76011
2920 Avenue "E" East
(817) 277-7211

Hagerstown, MD 21740
East Oak Ridge
Rt. 9, Box 17A
(301) 797-0826